



MCT 360 **NIR** Transmitter

The First Choice for Near Infrared (NIR) Measurement

PROCESS SENSORS
CORPORATION 



The Next Generation

N I R T R A N S M I T T E R

Typical constituents include:

- O—H** for Moisture & Alcohol
- C—H** for Oils, Fats, Adhesives & Plastics
- N—H** or Proteins, Ammonia & Amines

Typical applications include:

Wood Products

- Particle board
- Fiberboard
- Hardboard
- Hog Fuels
- Medium Density Fiberboard
- Oriented Strand Board

Food Products

- Snack Foods
- Pet Foods
- Coffee
- Starches
- Cereals
- Soy Bean & Corn Meals
- Milk Powders
- Cookies & Crackers

Tobacco Products

- Whole Leaf
- Lamina Strips
- Stems
- Cut
- Reconstituted
- Expanded
- Chewing Tobacco

Paper Converting

- Moisture & Coatweights
- Re-moisturizing
- Hot Melts
- Extruded Plastics
- Pressure Sensitive Adhesives
- Carbonless Coatings

Chemicals & Minerals

- Crumb Rubber
- PVC Powders
- Ceramics
- Fertilizers
- PVB Films
- Plastic Chips
- Detergents
- Soaps
- Ores

A Versatile, High Performance Stand-Alone Transmitter

The MCT360 NIR Transmitter was designed by Process Sensors in response to industry's need for a high quality sensor at an economical price. Its versatile design permits the Transmitter to operate on its own or in a multi-point network.

The Transmitter's stand alone design eliminates the need for a central processor, along with associated interconnecting cables and conduit. Installation and maintenance costs are virtually eliminated. The Transmitter contains all the optics and electronic components to perform the measurements, plus provide analog and digital signals for communication to computers, controllers and PLCs.

Proven Accuracy and Stability in a Wide Range of Applications

Used in a wide variety of industrial processes, the MCT360 Multi-Constituent NIR Transmitter, a True Stand-Alone Transmitter, provides off-line accuracy under on-line operating conditions. Simultaneous information on important product constituents is instantly available to plant operators and control systems, all from a single MCT360 sensor.

Advanced Features


Fully committed to technical innovation and product versatility, the MCT360 offers the industry's most useful and advanced features:

- True Stand-Alone Robust Transmitter Design
- Single High Quality PbS Detector
- Automatic Temperature Control Circuit
- Highest Quality NIR Interference Filters
- Dual Beam Wavelength Compensation
- 5-Year Lamp Warranty
- 2-Year Component Warranty
- Proven, Long-Life Motor
- Multi-Language Operator Interface (English, Spanish, Chinese, Russian, German, French, Portuguese, Italian, Polish, etc.)

MCT360 NIR Transmitter

Computer Software

Process Sensors Corporation (PSC) Viewer Software is a proprietary Windows-based package. It monitors all MCT360 functions and allows an operator to insert set-up parameters, perform or adjust calibrations, select product codes, examine internal diagnostic values and view trends of moisture and temperature.




360 Transmitter Improvements

- Single board solution
- All surface mount electronics
- Software driven adjustable motor speed
- Supports Profibus, Ethernet, Devicenet, Profinet, Modbus TCP/IP, Modbus RTU, Bluetooth
- Dual Micro Technology
- Dual Gain Filter Processing
- 4 Measurements, including Product Temperature
- Improved A/D converters...increased signal to noise ratio
- Touch Screen Operator Interface



Moisture and oil in potato chip

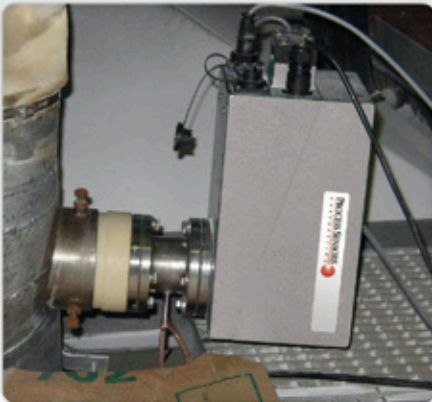

Automatic sampler, moisture in chemical powder



Moisture through sight glass

Near Infrared (NIR) Operating Principle

Several molecular bonds absorb near infrared light at well defined wavelengths. The common bonds are O-H in water, C-H in organics & oils and N-H in proteins. The absorbance level at these specific wavelengths is proportional to the quantity of that constituent in the material.

Narrow band pass filters within the Transmitter create a sequence of light pulses. At least one of these pulses is at the absorbance wavelength specific to the constituent to be measured. The other pulses are created at wavelengths not absorbed by the measured constituent. The pulses illuminate the product and the diffuse reflected light is collected and focused onto a single, temperature controlled detector. The electrical signals generated by the detector are then processed to provide a value that is proportional to the concentration of the measured constituent. The value is then displayed in % or other engineering units.

PROCESS SENSORS
CORPORATION 

For more information on Process Sensors instruments and accessories, visit our website at:

www.processsensors.com

MCT360 NIR Transmitter

MCT360 NIR Transmitter

SPECIFICATIONS: MCT 360 TRANSMITTER

Measured NIR Constituents: 1, 2 or 3 simultaneously
 Moisture Range: Min. 0.1%, Max. 95%
 Coatings Range: Min. 0.1gr/m, Max. 200 gr/m
 Fats/Oils: Min. 0.1%, Max. 50%

Accuracy: (subject to application and product type)

Moisture Range: +/- 0.1%
 Coatings Range: +/- 0.1 gr/m
 Fats/Oils: +/- 0.2%

Repeatability: +/- 0.2%
 Transmitter/Product Distance: 6-16 inches (150-400mm)
 Calibration Code: 10 standard, up to 50 on request
 Response Time: 1-99 seconds. Three modes available
 Damping, Integration and Gated.

Power: 90-260VAC 50/60 Hz, 40 watts
 24VDC optional

Outputs: Four 4-20 mA & 0-10 V (isolated), RS232 & RS485
 Weight: 20 lbs. (9 Kg)

Ambient Temperature: 0-50° C (32-120°F, to 80° C (160°F) with water or air cooling panel.

Enclosure: Cast Aluminum, IP65
 Window Purge: Airpurge Diffuser requires 5 psi and 2 l/m

Operator Interface: Wall or Post Mounting

Display: Color Touch Screen LCD
 Languages: English, plus one local, user selectable (Spanish, French German, Portuguese, Italian, Polish, Russian, Swedish & Chinese)


Power: From MCT 360 Transmitter

Cable: 10 ft (3 meters) standard, maximum 100 ft (30 meters)

Keypad: Access to MCT 360 settings, including calibrations, product codes and diagnostics.

Enclosure: Cast Aluminum

DIMENSIONS: Touch Screen Operator Interface

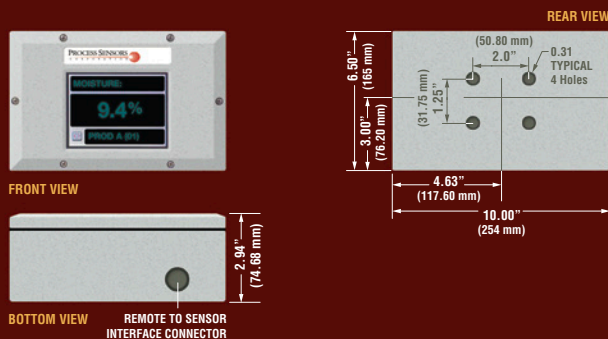

Options and Accessories:

Enclosure Construction: Kynar Coated Food Grade Sensors with Sapphire or Polymeric Windows.

Cooling Panels: Air or Water Cooling Panels for installations above 50°C (120°F)

Product Loss Sensors: Detection of product presence/absence
 Samplers: Stainless Auto Sampler for gravity or pneumatically conveyed products.

Maintenance:

Warranty: 24 months for all parts and labor.

Routine: None required.

Calibration: Pre-calibrated, no recalibration needed.

Calibration Verification: Calibration Check Standards

CE Compliance:


EMC directives EN50081-1 & EN50082-2, EN61010-1 Low Voltage directive.

Data Bus & Software Interfaces:

Optional Plug In Interfaces: Ethernet TCP/IP, DeviceNet, Profibus, Modbus.

Software: Windows-based stand-alone program or OPC-DDE server

DIMENSIONS: MCT 360 Transmitter

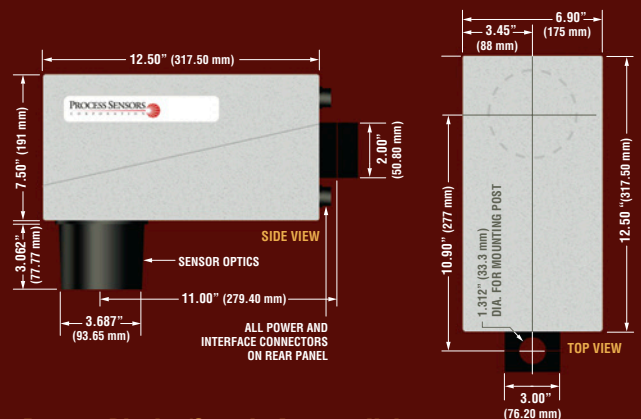


Remote Display/Sample Average Unit

Display: Alpha-Numeric Display

Pushbutton: Grab Sample Average

Enclosure: Cast Aluminum

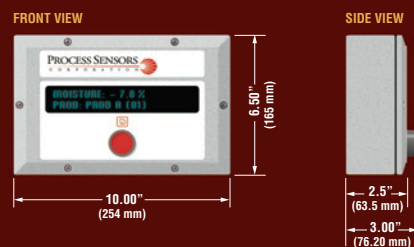

For more information on Process Sensors instruments and accessories, visit our website at: www.processsensors.com

HEADQUARTERS

United States - Process Sensors Corporation
 113 Cedar Street Milford, MA 01757 USA
 Tel: (508) 473-9901 | Fax: (508) 473-0715
 info@processsensors.com

Europe - Process Sensors Europe

Unit 4, Adelaide House Corbygate Business Park
 Corby, Northants NN17 5JG United Kingdom
 Tel: 01536 408066 | Fax: 01536 407813
 info@processsensors.com

Eastern Europe - Process Sensors Polska

Biuro Informacyjne Techniki Pomiarowej
 03-980 Warszawa ul. Znanieckiego 16/23 Poland
 Tel: (48) 22 6739526 | Fax: (48) 22 6739527
 tomasz@processsensors.com