


PYROVIEW Accessories

Power supply box

Part number: 2301A04002

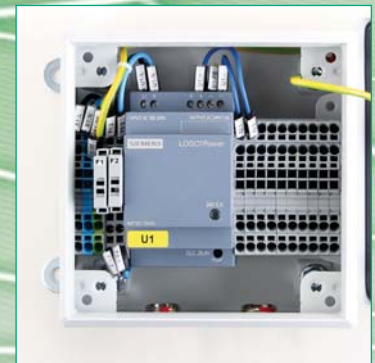

Description

For the power supply of the DIAS infrared cameras PYROVIEW and PYROLINE in industrial application you can easily use the power supply box (IP65 protected). The quick-acting cover is equipped with a protective seal and can be opened easily.

This box contains a cap rail power supply with a wide input voltage range between 100 and 240 VAC and all necessary clamping units to attach the connection cable of the cameras. The power input fused. You can adjust the power output for large cable lengths to compensate the resulting fall of potential.

All incoming cables can be easily installed by a cable gland system and are thereby protected.

Technical data

Providing the supply voltage	direct-current voltage 24 V DC
Camera connection	clamping units for the system cable of the camera
Dimensions	150 mm × 150 mm × 80 mm (W × H × D)
Weight	approx. 1 kg
Power supply	230 V AC, typical 20 V A
Housing	powder coated steel sheet, IP65
Installation	install the box with the help of the mounting links
Allowed operating temperature	0 °C to 50 °C
Storage conditions	-20 °C to 70 °C, max. 95 % relative humidity
Power pack	cap rail power pack 100-240 V AC, 47-63 HZ, 24 V DC 1A

PYROVIEW Accessories

Power supply box

Accessories	
Description	Part number
System cable for PYROVIEW compact+, HC10, 12 pin, wire ends are open	
System cable 5 m	2301A14006
System cable 10m	2301A14011
System cable 20 m	2301A14021
System cable 25 m	2301A14026
System cable 30 m	2301A14022
Ethernet cable for PYROVIEW compact+, (M12-RJ45, Cross, 8 pin)	
Ethernet cable 5 m	2301A32005
Ethernet cable 10 m	2301A32010
Ethernet cable 15 m	2301A32015
Ethernet cable 20 m	2301A32020
Ethernet cable 25 m	2301A32025
Ethernet cable 30 m	2301A32030
System cable for PYROVIEW protection, RC16, 16 pin, wire ends are open	
System cable 5 m	2301A12005
System cable 10 m	2301A12010
System cable 20 m	2301A12020
System cable 25 m	2301A12025
System cable 30 m	2301A12030
System cable 20 m , high-temperature (7 pin) temperature range: -20 °C ... 125 °C	2301A12020HT
Ethernet cable for PYROVIEW protection, Ethernet cable (M12-RJ45, Cross, 8 pin)	
Ethernet cable 5 m	2301A32005
Ethernet cable 10 m	2301A32010
Ethernet cable 15 m	2301A32015
Ethernet cable 20 m	2301A32020
Ethernet cable 25 m	2301A32025
Ethernet cable 30 m	2301A32030
Ethernet cable 20 m high-temperature, temperature range: -20 °C ... 125 °C	2301A32020HT

