


Dimensions (without fittings):

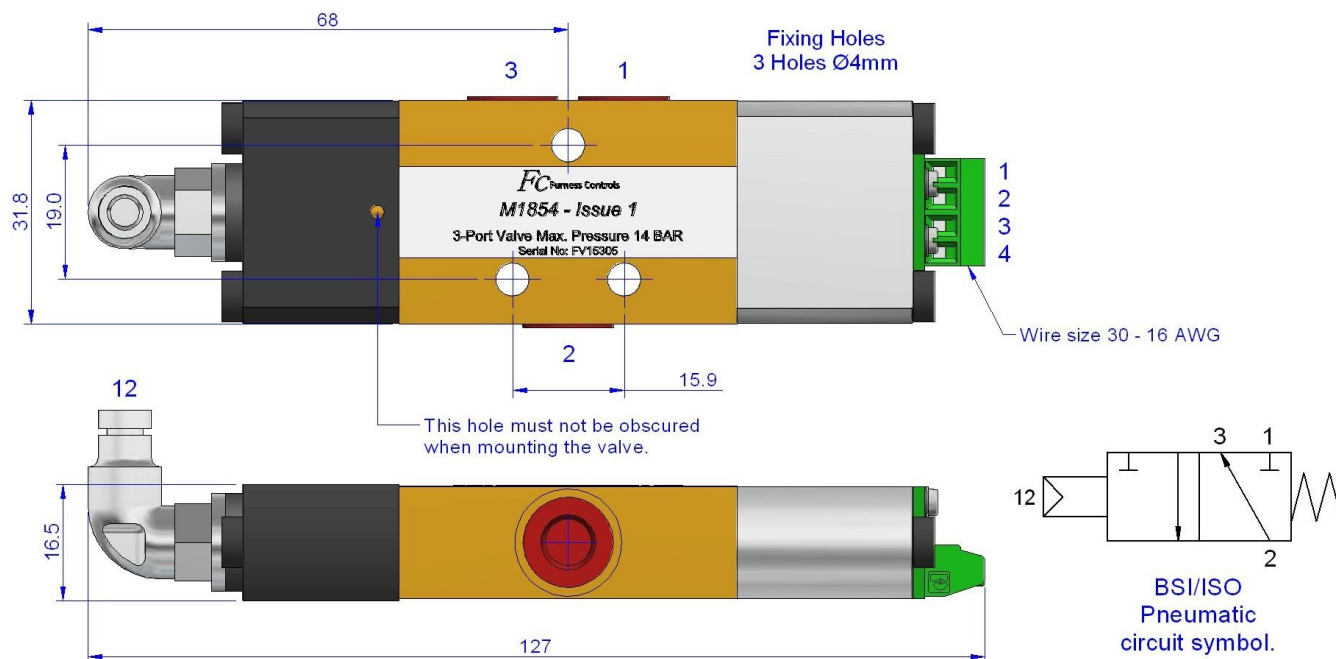



Specification:

Port Size (Ports 1,2,3):	1/8" BSP (G1/8)
Port Size (Port 12):	4 mm o/d push-in tube fitting
Actuation Pressure (port 12):	5 – 10bar
Working pressure:	-1 to +14 bar
Leak tightness:	< 0.01 cc/m
Flow rate coefficients:	Ports 1-2 Qn = 115 Cv = 0.092 Kv = 0.107 Ports 2-3 Qn = 45 Cv = 0.036 Kv = 0.042

Fitting Options:

- Port 1 = 6mm o/d 4mm i/d push-on fitting or 1/4" O/D compression fitting
- Port 2 = 6mm o/d 4mm i/d push-on fitting or 1/4" O/D compression fitting
- Port 3 = 6mm o/d 4mm i/d push-on fitting or 1/4" O/D compression fitting or Exhaust Silencer

Valve Sensor Connections

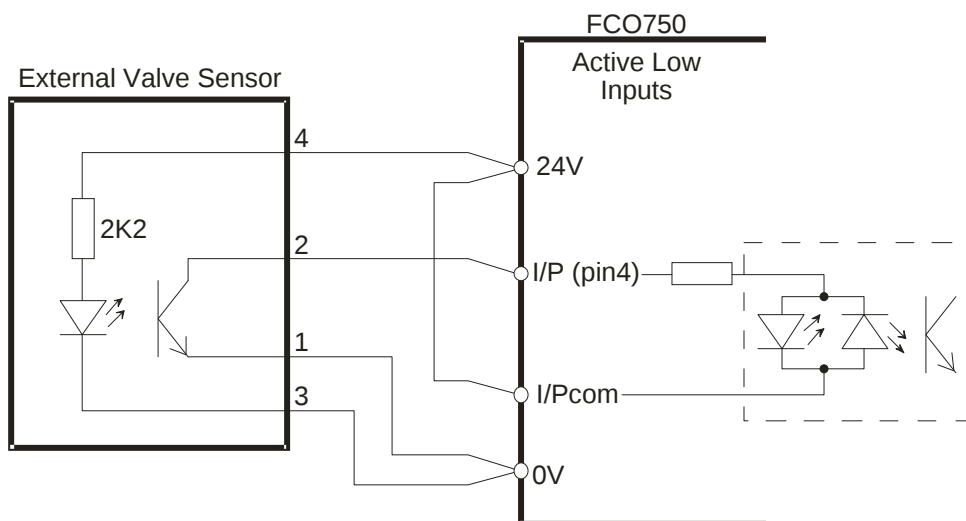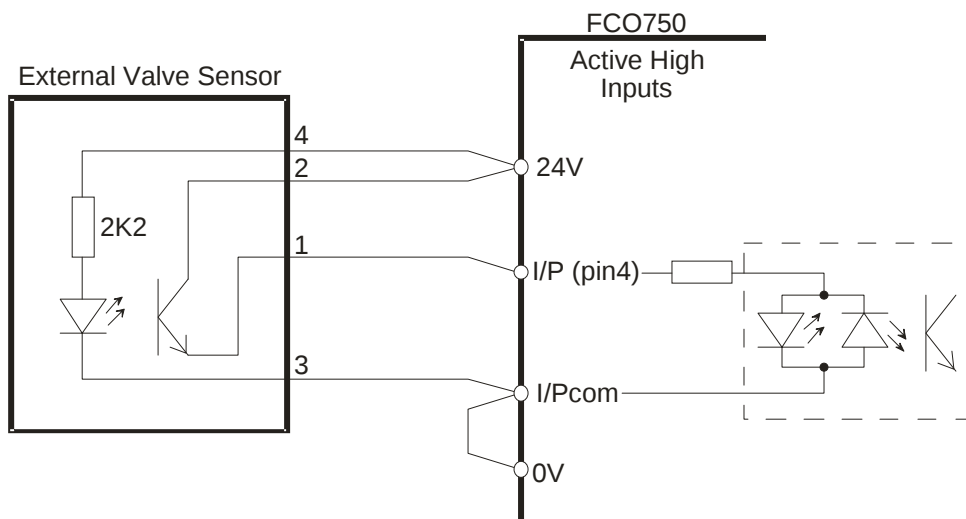

Furness Controls has a UKAS accredited laboratory which offers pressure calibration from 0 to 40 kPa and flow calibration from 0.1 ml/min to 2000 litres/min

